

PRODUCT DATA SHEET

MV5-AR: Compact, Ruggedized, CAN Bus Vertical Reference Unit and IMU

The MV5-AR gyro-stabilized inclinometer delivers precision measurements of dynamic inclination, acceleration, and angular rate in challenging environments such as those encountered by heavy-duty construction, off-highway, agriculture, and trucking industries.

The MV5-AR utilizes the power of a sophisticated Auto-Adaptive Extended Kalman Filter (EKF) to remove errors associated with vibration, sudden linear motions, and quake, resulting in a true reading of inclination under all conditions.

The MV5-AR's state-of-the-art temperature compensation and calibration assures error-free performance over the full operational temperature range.

The compact size, wide 4.5 to 36 V power range, IP68/IP69K rating, and CAN J1939 or CANopen communications protocol make the MV5-AR a single part solution for a full range of vehicle sizes and applications.



MEASUREMENT PERFORMANCE

- 6 DOF gyro-stabilized inclinometer
- Full accuracy over the entire operational temperature range of -40°C to +85°C
- Auto-Adaptive EKF provides superior dynamic accuracy
- Based on MicroStrain by HBK's proven 5th generation industrial/aerospace solid-state MEMS gyro technology

RUGGEDIZED FOR OFF-HIGHWAY USE

- Compact and rugged reinforced PBT housing is fully sealed for immersion, pressure wash (IP68/IP69K)
- Low-cost, rugged, reliable AMPSEAL 16 connector
- Optional metal guard plate protects sensor and connector and allows connector insertion and removal

FLEXIBLE DEPLOYMENT OPTIONS


- CAN J1939 or CANopen communication
- Simple sensor to vehicle alignment, install in any orientation
- Wide power input range (4.5Vdc-36 Vdc)
- User-settable parameters

APPLICATIONS

- Auto-steer and terrain compensation
- Dynamic incline detection (roll, pitch, rotation)
- Vehicle stability and leveling
- Platform control, alignment and stabilization
- Bucket/Stick/Boom angle
- Impact detection
- Operator feedback
- Precision navigation

MICROSTRAIN MV5-AR SPECIFICATIONS

General		
Integrated Sensors	Triaxial accelerometer, triaxial gyroscope	
Data Outputs	Pitch, Roll, Angular Rate, Acceleration	
Inertial Measurement Unit (IMU) Sensor Outputs		
	Accelerometer	Gyroscope
Measurement Range	±20 g	±1000° /sec
Output Range	±320 m/s ²	±250 °/sec
Non-linearity	±0.04% fs	±0.06% fs
Resolution*	0.05 mg	<0.003° /sec
Bias instability	±0.08 mg	8°/hr
Initial bias error	±0.004 g	±0.1° /sec
Scale factor stability	±0.05%	±0.05%
Noise density	85 µg/√ Hz	0.0075° sec/√Hz
Alignment error	±0.05%	±0.05°
Bandwidth	40 Hz	40 Hz
Offset error over temperature	0.2% (typ)	0.1% (typ)
Gain error over temperature	0.1% (typ)	0.1% (typ) 0.4% (max)
Scale factor non-linearity (@ 25°C)	0.1% (typ) 0.2% (max)	0.04% (typ) 0.15% (max)
IMU data output rate	100 Hz default (1-500 Hz selectable)	

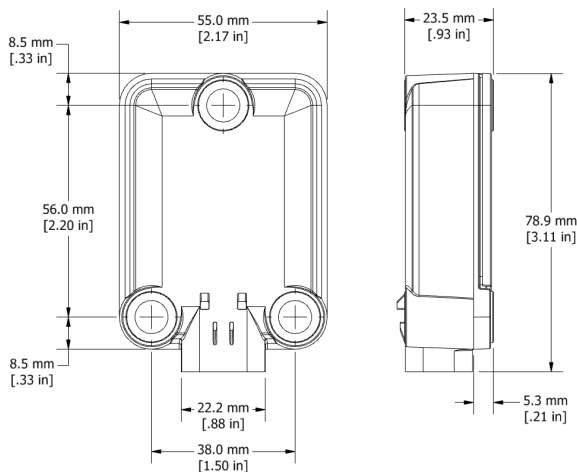

MicroStrain by HBK
 459 Hurricane Lane
 Williston, VT 05495 - USA

Attitude (pitch and roll) Outputs	
Accuracy	±0.2° RMS roll and pitch
EKF update rate	500 Hz
Pitch	±90°
Roll	±180°
Resolution*	0.05°
Repeatability	0.2°
Max Data output rate	500 Hz default (1-500 Hz selectable)
Attitude (pitch and roll) Outputs	
Dimensions	L 78.9 mm x W 55.0 mm x H 23.5 mm
Weight	110.5 grams
Power source	+4.5 V Min, 12/24 V Nominal, +36 V Max
Power consumption	625 mW Nominal
Operating temperature	-40°C to +85°C
Enclosure material	PBT Thermoplastic, Reinforced
Ingress protection	IP68 (Immersion), IP69K (Pressure Wash)
Vibration (random)	MIL-STD-202G, Method 214A, Test Condition 1-B, 24 hrs/axis
Vibration (sweep)	SAE J1455 Appendix A 10-2000Hz, 10 g Peak, 10hr/octave/axis
Thermal shock	SAE J1455 4.1.3.2
Salt spray	MIL-STD-202G, Method 101E Condition A (96 hours)
Hot dunk	5X, 30 mins @ 85C, 30 mins @ ice bath, operating
Mechanical shock drop	SAE J1455 4.11.3.1; 1m onto concrete surface
Mechanical shock operating	MIL STD 202, M213B; 50g, 11ms 1/2sine, 3x each axis; 18 total
MTBF	826,440; Telcordia SR332 (issue 3)
Connectors	AMPSEAL 16 gold plated 4 pin, 4 Position, gold plated pins
Mounting	3 x M8, installation torque 20 Nm ±2 Nm
Regulatory compliance	RoHS, REACH, CE
Communication options	
J1939	Order P/N 6243-7790
CANopen	Order P/N 6243-7792
CAN 250 kb/s, custom baud rates available.	

*NOTE: Communications protocol may impose resolution limits beyond those of the measuring device. Refer to product manual for details.