


PRODUCT DATA SHEET

# SG-Link-200-OEM: Wireless 2 Channel Analog Input Node

The MicroStrain wireless sensor networks enable simultaneous, high-speed sensing and data aggregation from scalable sensor networks. Our wireless sensing systems are ideal for test and measurement, remote monitoring, system performance analysis, and embedded applications.

The SG-Link-200-OEM allows for remote data collection from a range of sensor types, including strain gauges, pressure transducers, and accelerometers. The node supports high resolution, low noise data collection from 1 differential and 1 single-ended input channels at sample rates up to 1 kHz. A digital input features compatibility with a hall effect sensor for reporting RPM and total pulses, ideal for many torque sensing applications.

Users can easily program nodes for continuous, periodic burst, or event-triggered sampling with the SensorConnect software. The optional web-based SensorCloud interface optimizes data aggregation, analysis, presentation, and alerts for sensor data from remote networks.

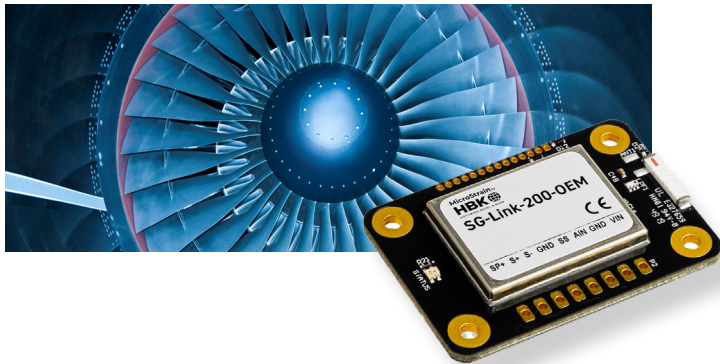

## PRODUCT HIGHLIGHTS

- 1 differential and 1 single-ended input channel
- Differential channel compatible with 120, 350, and 1k Ohm Wheatstone bridge sensing circuits
- On-board temperature sensor
- Digital input channel for RPM and pulse counting
- Supply power from 3.3 to 30 V
- Continuous, periodic burst, and event-triggered sampling
- Output raw data and/or derived channels such as mean, RMS and peak-peak
- LXRS protocol allows lossless data collection, scalable networks and node synchronization of  $\pm 50 \mu\text{s}$
- Remote strain calibration using on-board shunt resistor

## HIGH PERFORMANCE


- Up to 1024 Hz sampling
- Low noise 1.5 or 2.5 V sensor excitation
- Noise as low as  $1 \mu\text{V}$  p-p
- High resolution 24-bit data
- Datalog up to 8 million data points
- Low power operation, well-suited for battery powered applications.
- Wireless range up to 1 km (400 m typical)
- $-40$  to  $+105^\circ\text{C}$  operating temperature range

## APPLICATIONS

- Strain, load, force, pressure, acceleration, vibration, displacement, or torque sensing.
- Condition-based monitoring (CBM)
- Structural load and stress monitoring
- Test and measurement
- RPM and pulse counting

# MICROSTRAIN SG-LINK-200-OEM SPECIFICATIONS

Analog Input Channels	
<b>Sensor input channels</b>	1 differential, 1 single-ended and 1 RPM/pulse input
<b>Sensor excitation output*</b>	DC to 1 kHz
<b>Measurement range</b>	20 bit
<b>Adjustable gain</b>	< 1%
<b>ADC resolution</b>	1% typical
<b>Noise (Gain = 128)</b>	±0.01%/°C typical
<b>Noise (Gain = 1)</b>	1.5 kHz (-6 dB attenuation)
<b>Temperature stability (-40 to +105°C)</b>	26 to 800 Hz - configurable
<b>Digital filter</b>	Off to 2.5 Hz - configurable
<b>Strain calibration</b>	Onboard shunt resistor used for deriving strain calibration coefficients ( $y = mx + b$ )
<b>Shunt calibration resistor</b>	499k Ohm (± 0.1%)
Integrated Temperature Channel	
<b>Measurement range</b>	-40°C to 105°C
<b>Accuracy</b>	±0.25°C
Sampling	
<b>Sampling modes</b>	Continuous, periodic burst, event triggered
<b>Output options</b>	Analog: Calibrated engineering units, accounts and derived channels (mean, RMS and peak-peak) Digital: Speed (Hz or RPM) and pulse counts
<b>Sampling rates</b>	Up to 1024 Hz
<b>Sample rate stability</b>	±5 ppm
<b>Network capacity</b>	Up to 128 nodes per RF channel (bandwidth calculator) <a href="http://www.microstrain.com/configure-your-system">http://www.microstrain.com/configure-your-system</a>
<b>Node synchronization</b>	±50 µsec
<b>Data storage capacity</b>	16 M Bytes (up to 8,000,000 data points)

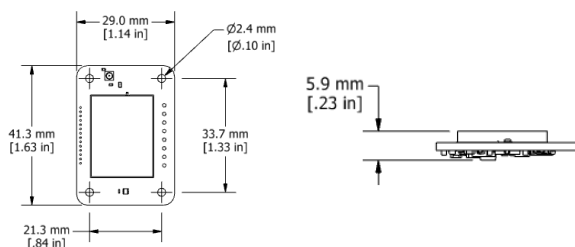

**MicroStrain by HBK**  
459 Hurricane Lane  
Williston, VT 05495 - USA

RPM Sensing				
<b>Sensor input</b>	Open collector, open drain or digital pulses from hall effect or other source			
<b>Range</b>	0.1 to 100 Hz (6 to 6000 RPM)			
<b>Accuracy</b>	±0.1% (typical)			
Operating Parameters				
<b>Wireless communication range **</b>	Outdoor antenna: 2 km (ideal), 800 m (typical) Onboard antenna: 1 km (ideal), 400 (typical) Indoor/obstructions: 50 m (typical)			
<b>Antenna</b>	Surface mount or external via U.FL connector			
<b>Radio frequency (RF) transceiver carrier</b>	License-free 2.405 to 2.480 GHz (16 channels)			
<b>RF transmit power</b>	User-set 0 dBm to 20 dBm. Restricted regionally			
<b>Power input range</b>	3.3 V dc to 30 V dc			
<b>Pulse Current***</b>	Tx Power	VIN=3.6V	VIN=5.0V	VIN=12V
	+20 dBm	135 mA	100 mA	45 mA
	+16 dBm or less	100 mA	70 mA	32 mA
<b>Operating temperature</b>	-40°C to +105°C			
<b>Angular acceleration limit</b>	500g sustained, 1000g intermittent			
<b>Mechanical Shock Limit ****</b>	1000g/1.5ms			
<b>ESD</b>	4 kV			
Physical Specifications				
<b>Dimensions</b>	41.3 mm x 29.0 mm x 5.9 mm			
<b>Interface</b>	Solder or screw-down terminal available			
<b>Weight</b>	7 grams			
Integration				
<b>Compatible gateways</b>	All WSDA gateways			
<b>Software</b>	SensorCloud, SensorConnect, Windows 7, 8 & 10 compatible			
<b>Software development kit</b>	<a href="http://www.microstrain.com/software/mscl">http://www.microstrain.com/software/mscl</a>			
<b>Regulatory compliance</b>	FCC (USA), IC (Canada), CE, RoHS (EU) MIC (Japan)			

\* Actual range varies with conditions

\*\* Extend battery life by using a faster filtering setting.

\*\*\* Power source must supply short duration pulse currents as determined by the transmit power setting and the supply voltage